




# General Catalog Pipe Tools

2023

Dedicated to pipe tools

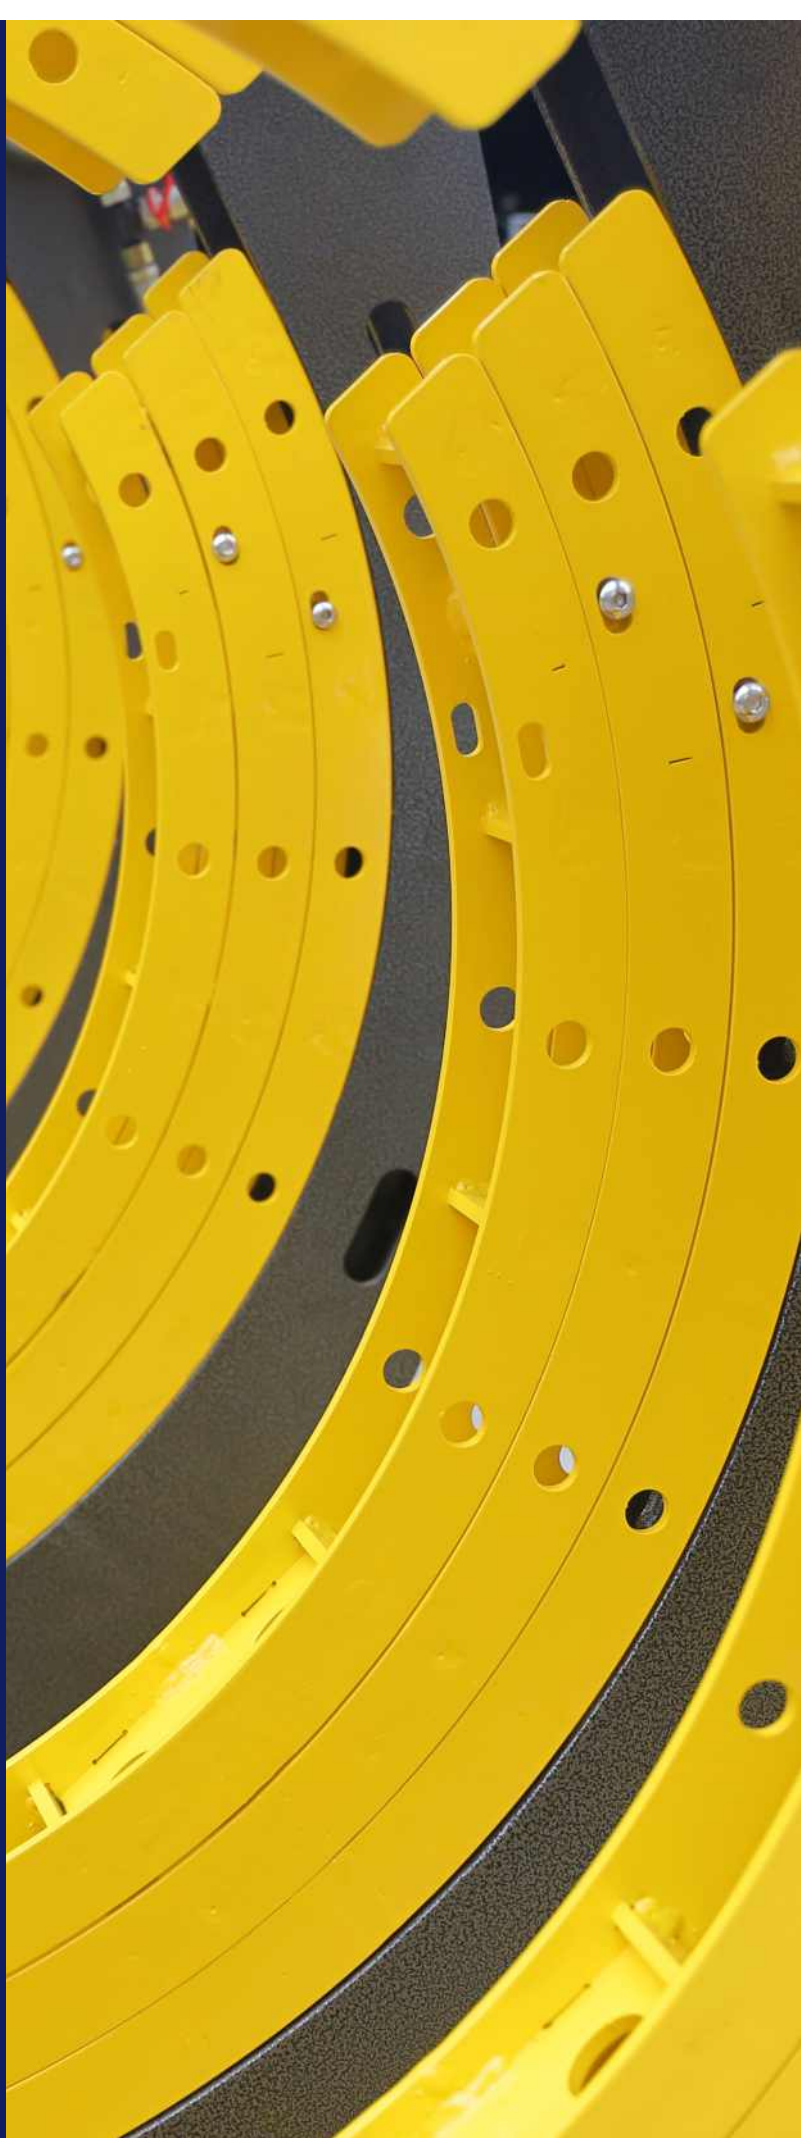

# Socket fusion welder

## Socket fusion welder

Digital series models add a digital controller and screen for improving the accuracy of the heating temperature. The temperature range can set as demand of different plastic pipes & fittings, required fusing temperature can fix and display on the screen, environment temperature will be adjusted and updated automatically, overtemperature will be alarmed automatically and etc. This provides a more excellent fusing result.

### Standard Parts

- 1 set Fusion welder
- 1 pc Support stand
- 1 pc Carrying case
- 1 set Tool kit



WP32TA  
WP63TA



WP110TA

Catalog No.	551032	551063	551110	551160
Model No.	WP32TA	WP63TA	WP110TA	WP160TA
Power supply	220/110V 50/60Hz, 1PH	220/110V 50/60Hz, 1PH	220/110V 50/60Hz, 1PH	220/110V 50/60Hz, 1PH
Power	800 W	1.0 KW	1.2 KW	1.8KW
Ambient temperature	- 20 - 85°C	- 20 - 85°C	- 20 - 85°C	- 20 - 85°C
Welding range	20-25-32mm	20-25-32-40-50-63mm	75-90-110mm	20-25-32-40-50-63 -75-90-110-160mm
Relative humidity	40~95%	40~95%	40~95%	40~95%
Certification	CE	CE	CE	CE
Heating plate temperature	260±5°C	260±5°C	260±5°C	260±5°C
Handle alarm temperature	>85°C	>85°C	>85°C	>85°C
Leakage of electric current	<5mA	<5mA	<5mA	<5mA
Weight	2.3kg	3.5kg	4.9kg	8kg
Packing Size	38*19.5*8.5cm	41.5*22.5*9cm	44.5*28.5*9.5cm	44*17*46cm



# Socket Fusion Welding

## Socket fusion welder

TB- perform excellently in plastic pipes series models welding. Industrial class welding shoes and heating plate with thicker materials guaranteed stable welding temperature.

Double insulation panels efficiently prevent heat dissipation. Engineering rubber handle, galvanized stand and clamping bracket make it easier in rough situations. Quality aluminum heat sink allows the machine to work for a long time.

Digital display optional for better operation experience.

### Standard Parts

- 1 set Socket welder
- 1 pc Support stand
- 1 pc Metal carrying case
- 1 set Welding shoes
- 1 set Tool kit



WP32TB



WP63TB



WP110TB

Catalog No.	552032	552063	552110
Model No.	WP32TB	WP63TB	WP110TB
Applicable material	PE, PB, PP, PVDF	PE, PB, PP, PVDF	PE, PB, PP, PVDF
Power supply	220V/50-60Hz, 1PH	220V/50-60Hz, 1PH	220V/50-60Hz, 1PH
Power	800 W	1.0 KW	1.2 KW
Ambient temperature	- 20 - 85°C	- 20 - 85°C	- 20 - 85°C
Welding range	20-25-32mm	20-25-32-40-50-63mm	75-90-110mm
Relative humidity	40~95%	40~95%	40~95%
Certification	CE	CE	CE
Working temperature	220°C-290°C	220°C-290°C	220°C-290°C
Handle alarm temperature	>310°C	>310°C	>310°C
Leakage of electric current	<5mA	<5mA	<5mA
Weight	3.5kg	7.8kg	8.5kg
Packing Size	39*20.5*8cm	45*25.5*12cm	45*25.5*12.5



WP32TB



WP63TB



WP110TB



**Hangzhou Welping Machinery Equipment Co., Ltd**

Phone: 00 86 571 89332538

E-mail: [top@welping.cn](mailto:top@welping.cn) Web: [www.welpingtool.com](http://www.welpingtool.com)

Office address: Room 1904 Building 1, Taifu Plaza, No. 1 Tonghui Middle Road,  
Xiaoshan District, Hangzhou

Factory address: No. 2 Jinyuan Road, Puyang Town, Xiaoshan District, Hangzhou, China